

 Paved road	 On/Off-Highway	 Unpaved Road Off-road
BT316 BT666 BT368 BT369 BT369N BT568 BT389	BT168 BT168A 168N BT360 WT360 BT518	
BT215 BT215N BT218 BT219 BT688 BT968 BT968N WT211		
BT398+ BT398N BT556 BT566 WT398+ BT577	BT118 BT119 BT151 BT156 BT157 BT159 BT188 BT712 WT126 WT712 BT150	BT122 BT128
BT215 BT267 BT668		
BT216 BT217 BT288 BT926 BT929	BT168 BT360	
BT957	BT718	
BT215		
BT215		

BT168**Regional & Medium****All position****CHARACTERISTICS**

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	12
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	12
8.25R20	16PR	236	974	139/137	2430/2300	930/930	K	6.5	13.5
9.00R20	16PR	259	1019	144/142	2800/2650	900/900	K	7.0	15.5
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16.5
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	K	8.0	17
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	K	8.5	15
12.00R20	22PR	315	1125	158/155	4250/3875	900/900	J	8.5	15
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	16
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	17.5
13R22.5	18PR	320	1124	156/150	4000/3350	875/875	L	9.75	15
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	M	9.00	15
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	17

BT168A Regional & Medium

All position

**CHARACTERISTICS**

★ Cost-effective

★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	15

BT168N Regional & Medium

All position

**CHARACTERISTICS**

★ Cost-effective

★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	16
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	16
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	16

BT215

Regional & Medium



All position



City Road

CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Fuel-economy
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	16PR		958	148/145	3150/2900	900/900	M	8.25	19.2
275/70R22.5	18PR		958	148/145	3150/2900	900/900	J	8.25	19.2

BT216

Regional & Medium



All position



Paved road



Highway

CHARACTERISTICS

- ★ Fuel-economy
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	12

BT217

Regional & Medium



All position



Paved road



Highway

CHARACTERISTICS

★ Fuel-economy

★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.00R16LT	14PR	200	775	118/114	1320/1180	770/770	L	5.50F	10

BT288

Regional & Medium



All position



Paved road



Highway

CHARACTERISTICS

★ Fuel-economy

★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	11
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	12

BT316

Regional & Medium



All position



Paved road

CHARACTERISTICS

★ Low fault rate

★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	17

BT360

Regional & Medium



All position



On/Off-Highway

CHARACTERISTICS

★ Low fault rate

★ Cost-effective

★ Anti-stone retention



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
6.50R16LT	12PR	185	750	110/105	1060/925	670/670	L	5.50F	12
7.00R16LT	14PR	200	775	118/114	1320/1180	770/770	L	5.50F	14
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15.5

BT368

Regional & Medium



All position

**CHARACTERISTICS**

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	K	8.0	15.5

BT369

Medium and long haul



All position

**CHARACTERISTICS**

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	18
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	18

BT369N Medium and long haul



All position



Paved road



Highway



CHARACTERISTICS

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	17.5

BT370 Medium and long haul



All position



Paved road



Highway



CHARACTERISTICS

★ Low fault rate

★ Cost-effective

★ Fuel-economy

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	14.5

BT389

Medium and long haul

**All position****Snow and ice road****CHARACTERISTICS**

- ★ Excellent wet grip performance ★ Strong traction
- ★ Excellent heat dispersion performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	825/825	L	8.25	21
11R24.5	16PR	279	1104	149/146	3250/3000	825/825	L	8.25	21

BT518

Medium and long haul

**All position****On/Off-Highway****CHARACTERISTICS**

- ★ Low fault rate ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	17

BT568

Regional & Medium



All position



CHARACTERISTICS

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16.5
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	15

BT666

Regional & Medium



All position



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	17.5

BT926

Medium and long haul



All position



Paved road



Highway



CHARACTERISTICS

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	16PR	212	767	135/133	2180/2060	850/850	J	6.00	13
225/70R19.5	14PR	226	811	128/126	1800/1700	760/760	M	6.75	13.5
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	13.5
245/70R19.5	16PR	248	839	136/134	2240/2120	825/825	M	7.50	13.5
9.5R17.5	18PR	240	842	143/141	2725/2575	875/875	M	6.75	12.5

BT929

Medium and long haul



All position



Paved road



Highway



CHARACTERISTICS

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10R22.5	16PR	254	1019	144/142	2800/2650	900/900	L	7.50	14.5
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	13.5

WT360

Regional & Medium



All position



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Anti-stone retention
- ★ Cost-effective
- ★ Fuel-economy
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	22PR	298	1044	154/149	3750/3250	850/850	K	9.00	17.5
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	K	9.00	17.5

BT212

Medium and long haul



Steer, trailer



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Fuel-economy
- ★ Anti-stone retention
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	14
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	14
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	14

BT212N Medium and long haul

Steer, trailer



Paved road



Highway

**CHARACTERISTICS**

- ★ Anti-irregular wear
- ★ Fuel-economy

- ★ Anti-stone retention
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	14
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	14
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	14
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	14

BT215 Medium and long haul

Steer, Trailer



Paved road



Highway

**CHARACTERISTICS**

- ★ Anti-irregular wear
- ★ Anti-stone retentio

- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/55R22.5	20PR	386	996	160	4500	900	K	12.25	15
425/65R22.5	20PR	430	1124	165	5150	825	K	12.25	15
435/50R19.5	20PR	438	931	160	4500	900	J	14.00	14

BT215N Medium and long haul



Steer, trailer



Paved road




Highway

CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Fuel-economy

- ★ Anti-stone retention
- ★ Cost-effective

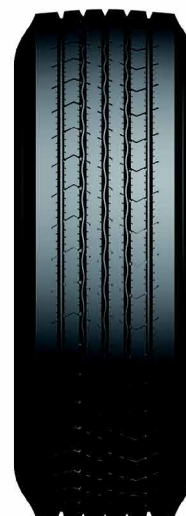

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	15

BT218 Medium and long haul



Steer, trailer



Paved road



Highway

CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Fuel-economy

- ★ Anti-stone retention
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14.8

BT219

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Fuel-economy

- ★ Anti-stone retention
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	14.8
275/80R22.5	16PR	276	1012	149/146	3250/3000	850/850	L	8.25	15
295/60R22.5	16PR	292	926	149/146	3250/3000	900/900	L	9.00	14.8
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	14.8
315/60R22.5	16PR	313	950	152/148	3550/3150	900/900	L	9.75	14.8
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15.5

BT688

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	16PR	276	958	148/145	3150/2900	900/900	M	8.25	14.8
315/70R22.5	18PR	312	1014	154/150	3750/3350	900/900	M	9.00	15

BT968

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	15
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15

BT968N

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	15

WT211

Regional & Medium



Steer, trailer



Paved road

**CHARACTERISTICS**

- ★ Anti-eccentric wear
- ★ Anti-wear
- ★ Cost-effective
- ★ Fuel-economy
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	22PR	298	1044	154/149	3750/3250	900/900	L	9.00	16.5
315/80R22.5	22PR	312	1076	158/156	4250/4000	850/850	L	9.00	16.5

WT712

Regional & Medium



Drive



On/Off-Highway

**CHARACTERISTICS**

- ★ Anti-irregular wear
- ★ Anti-stone retention
- ★ Cost-effective
- ★ Fuel-economy
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	K	9.00	19

BT118

Regional



Drive



CHARACTERISTICS

- ★ Strong traction
- ★ High load capacity
- ★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	F	7.5	21
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	F	8.0	22
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	22

BT119

Regional



Drive



CHARACTERISTICS

- ★ Strong traction
- ★ High load capacity
- ★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	D	8.5	31

BT122

Regional



Drive



Off-road

**CHARACTERISTICS**

★ Strong traction

★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	F	9.00	24

BT128

Regional



Drive



Off-road

**CHARACTERISTICS**

★ High load capacity

★ Strong traction

★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	D	7.5	24
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	F	8.0	24
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	24

BT150

Regional & Medium



Drive



CHARACTERISTICS

★ Cost-effective

★ Strong traction

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	18PR	276	958	148/145	3150/2900	900/900	J	8.25	20

BT151

Regional & Medium



Drive



CHARACTERISTICS

★ High load capacity

★ Strong traction

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	J	8.0	20
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	J	8.5	20.5

BT156

Regional & Medium



Drive



On/Off-Highway

**CHARACTERISTICS**

- ★ High load capacity
- ★ Cost-effective

- ★ Strong traction

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	K	19
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	K	19.5

BT157

Regional & Medium



Drive



On/Off-Highway

**CHARACTERISTICS**

- ★ High load capacity
- ★ Cost-effective

- ★ Strong traction

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	19
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	19.5

BT159

Regional & Medium



Drive



CHARACTERISTICS

★ Cost-effective

★ Strong traction

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	K	8.25	22

BT188

Regional & Medium



Drive



CHARACTERISTICS

★ Cost-effective

★ Strong traction

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	22
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	G	8.25	24.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	G	8.25	24.5
13R22.5	18PR	320	1124	156/150	4000/3350	875/875	K	9.75	22

BT388

Medium and long haul



Drive



Paved road



Highway

**CHARACTERISTICS**

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER							
11R22.5	16PR	279	1050	148/145	3150/2900	850/850		M	8.25	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900		M	9.00	20.5
315/70R22.5	18PR	312	1014	154/150	3750/3350	900/900		M	9.00	19
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850		L	9.00	21

BT388N

Regional & Medium



Drive



Paved road



Highway

**CHARACTERISTICS**

- ★ Anti-irregular wear
- ★ Cost-effective
- ★ Anti-stone retention
- ★ Fuel-economy
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER							
12R22.5	18PR	300	1085	152/149	3550/3250	930/930		L	9.00	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900		M	9.00	21
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850		L	9.00	21

BT398+ Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Cost-effective
- ★ Anti-wear
- ★ Fuel-economy
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	24

BT398N Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	19.5

BT556

Medium and long haul



Drive



Paved road



Highway

**CHARACTERISTICS**

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5

BT566

Medium and long haul




Drive



Paved road



Highway

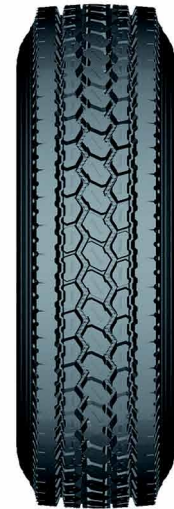**CHARACTERISTICS**

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5

BT577

Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	146/143	3150/2900	850/850	M	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5

BT588

Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	146/143	3150/2900	850/850	M	8.25	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	21
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21

BT599

Medium and long haul



Drive

**CHARACTERISTICS**

- ★ Excellent heat dispersion performance ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER							
11R22.5	16PR	279	1054	146/143	3000/2725	830/830		L	8.25	23.5

BT712

Regional & Medium



Drive

**CHARACTERISTICS**

- ★ Cost-effective ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER							
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850		K	9.00	19

BT718

Regional & Medium



Drive



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	L	6.00G	13.5
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	15

BT957

Medium and long haul



Drive



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	16PR	212	767	135/133	2180/2060	850/850	J	6.00	14.5
225/70R19.5	14PR	226	811	128/126	1800/1700	760/760	L	6.75	15
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	15.4
245/70R19.5	16PR	248	839	136/134	2240/2120	825/825	M	7.50	16
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	15.5
9.5R17.5	18PR	240	842	143/141	2725/2575	875/875	K	6.75	15.5

WT126

Regional



Drive



On/Off-Highway

**CHARACTERISTICS**

- ★ Anti-irregular wear ★ Anti-wear ★ Cut & chip resistance
- ★ Cost-effective ★ Fuel-economy ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER							
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900		D	9.00	22

WT398+

Medium and long haul



Drive



Paved road



Highway

**CHARACTERISTICS**

- ★ Anti-eccentric wear ★ Cost-effective
- ★ Anti-wear ★ Fuel-economy ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER							
295/80R22.5	22PR	298	1044	154/149	3750/3250	850/850		L	9.00	19
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900		L	9.00	20

BT215

Regional & Medium



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
ST235/85R16	14PR	235	806	132/127	2000/1750	760/760	L	6.50	9.5
ST225/90R16	14PR/G	220	808	128/124	1800/1600	830/830	K	6.00	12
ST235/80R16	14PR/G	235	782	128/124	1800/1600	725/725	L	6.50	9.5

BT267

Medium and long haul



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	17

BT667

Medium and long haul



Trailer



Paved road



Highway

**CHARACTERISTICS**

★ Fuel-economy

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	10
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	10
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	10
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	10

BT668

Medium and long haul



Trailer



Paved road



Highway

**CHARACTERISTICS**

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	15

BT669

Medium and long haul



Trailer



Paved road



Highway



CHARACTERISTICS

★ Fuel-economy

★ Low fault rate

★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	10
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	10
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	10
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	10